
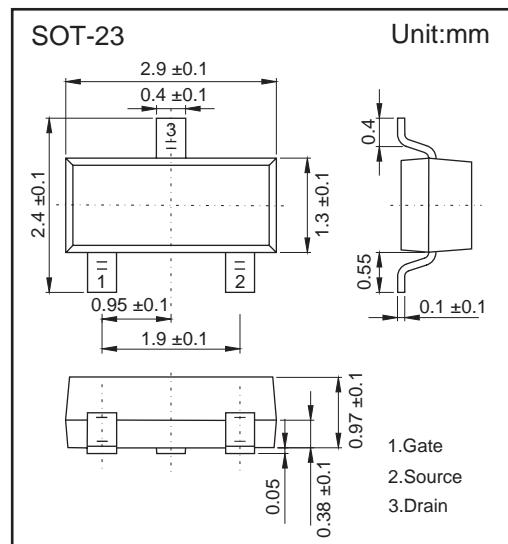


### ■ Features

- $V_{DS}=20V$
- $I_D=5.0A$
- $R_{DS(ON)}=25m\Omega @ V_{GS}=4.5V, I_D=5.0A$
- $R_{DS(ON)}=35m\Omega @ V_{GS}=2.5V, I_D=4.0A$



### ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	20	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	
Continuous Drain Current $T_j=125^\circ C$	$I_D$	5.0	A
Pulsed Drain Current	$I_{DM}$	15	
Power Dissipation	$P_D$	1.25	W
Thermal Resistance.Junction- to-Ambient	$R_{thJA}$	100	$^\circ C/W$
Junction Temperature	$T_J$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55 to 150	

## ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V <sub>DSS</sub>	V <sub>GS</sub> =0V,I <sub>D</sub> =250uA	20			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>Ds</sub> =20V,V <sub>GS</sub> =0V			1	uA
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>GS</sub> =±10V,V <sub>Ds</sub> =0V			±100	nA
Gate Threshold Voltage *	V <sub>GS(th)</sub>	V <sub>GS</sub> =V <sub>Ds</sub> ,I <sub>D</sub> =250uA	0.4	0.7	1.0	V
Drain- Source on-state Resistance *	R <sub>Ds(ON)</sub>	V <sub>GS</sub> =4.5V,I <sub>D</sub> =5.0A		25	34	mΩ
		V <sub>GS</sub> =2.5V,I <sub>D</sub> =4.0A		35	46	mΩ
Forward Transconductance *	g <sub>FS</sub>	V <sub>Ds</sub> =5V,I <sub>D</sub> =5A	5			S
Input Capacitance	C <sub>ISS</sub>	V <sub>Ds</sub> = 15V, V <sub>GS</sub> = 0V,f = 1.0MHz		887		pF
Output Capacitance	C <sub>OSS</sub>			144		pF
Reverse Transfer Capacitance	C <sub>RSS</sub>			115		pF
Turn-On Delay Time	t <sub>D(on)</sub>	V <sub>DD</sub> =10V,I <sub>D</sub> =1A,V <sub>GS</sub> =4.5V,R <sub>L</sub> =10Ω, R <sub>GEN</sub> =6Ω		31.8		ns
Rise Time	t <sub>r</sub>			14.5		ns
Turn-Off Delay Time	t <sub>D(off)</sub>			50.3		ns
Fall Time	t <sub>f</sub>			31.9		ns
Total Gate Charge	Q <sub>g</sub>	V <sub>Ds</sub> = 10V, I <sub>D</sub> = 3.5A,V <sub>GS</sub> = 4.5V		16.8		nC
Gate-S ource Charge	Q <sub>gs</sub>			2.5		nC
Gate-Drain Charge	Q <sub>gd</sub>			5.4		nC
Drain-Source Diode Forward Current *	I <sub>s</sub>				1.25	A
Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V,I <sub>s</sub> =1.25A		0.825	1.2	V

\* Pulse Test:Pulse Width≤300 μs,Duty Cycle ≤2%

■ Typical Characteristics

